Quick Start Guide

RemoteLinc™ – INSTEON® Wireless Remote Control

Model #2440BK

Introduction

RemoteLinc allows you to use the power of INSTEON to control your home with the convenience of a handheld wireless controller. RemoteLinc can control up to six scenes and features a customizable label insert.

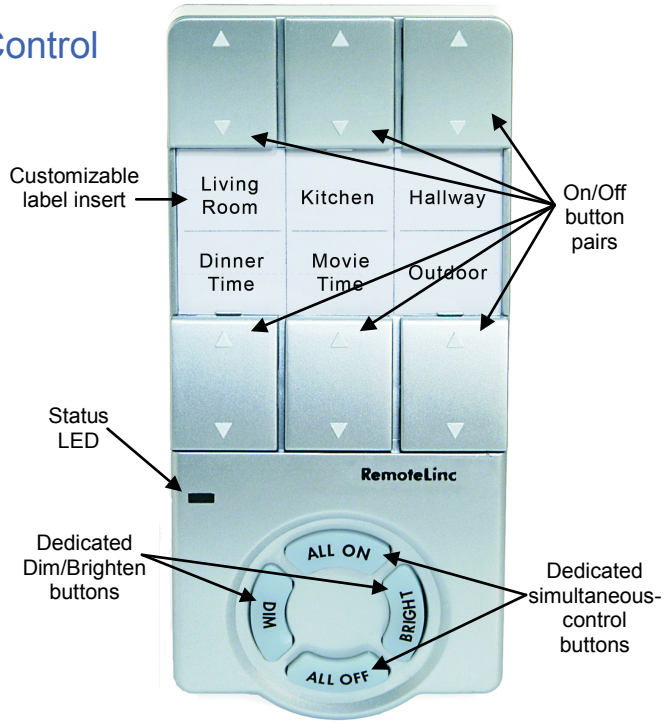

Setting Up RemoteLinc

1) RF-only devices require at least one dual-band INSTEON device for communication. For the best INSTEON network performance, be sure you have properly installed at least two Access Points or other dual-band INSTEON devices.
2) Remove the battery compartment from the rear of RemoteLinc and install four AAA batteries.
3) Replace the battery compartment door.

NOTE: Use alkaline batteries, or high quality rechargeable batteries. A fully charged set of alkaline batteries will provide approximately 1,500 – 2,000 button taps.

Using RemoteLinc as an INSTEON Controller

1) On RemoteLinc, press and hold the On button of the button pair you wish to use until it beeps (10 seconds).
   RemoteLinc's status LED will begin blinking.
2) Set the responder to the state you want to activate from RemoteLinc.
3) Press and hold the responder's Set button for 3 seconds
   RemoteLinc will beep and its status LED will turn off.
4) Test link by tapping the On/Off buttons you just linked to on RemoteLinc.
   The responder should respond appropriately.

Using RemoteLinc

Each button on RemoteLinc has a dual purpose. Linked responders will behave differently depending on what button you press, and whether it is tapped or pressed and held.

Button	Applies To	Tap	Press and Hold
On	Device(s) linked to that specific button pair	Ramp to On-Level	Brighten until release
Off	Device(s) linked to that specific button pair	Ramp to Off	Dim until release
All On	All devices linked to RemoteLinc	Fast-on	Brighten until release
All Off	All devices linked to RemoteLinc	Fast-off	Dim until release
Brighten	Device(s) linked to last On/Off button pushed	Brighten by 3 levels (out of 32)	Brighten until release
Dim	Device(s) linked to last On/Off button pushed	Dim by 3 levels (out of 32)	Dim until release

NOTE: Non-dimming responders will not be affected by brighten/dim commands or pressing and holding any of the buttons.

Complete Instructions, Troubleshooting and Tech Support

Owner's Manual and Quick Start Guide: http://www.insteon.com/support
Call: INSTEON Support Line at 800-762-7845

*Setup Modes automatically time out after 4 minutes.

This device complies with FCC Rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
Le present appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorise aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radiolectrique subi, mme si le brouillage est susceptible d'en compromettre le fonctionnement.

INSTEON Limited Warranty – INSTEON warrants to original consumer of this product for a period of 2 years from date of purchase, this product will be free from defects in material and workmanship and will perform in substantial conformity with its Owner's Manual. Warranty shall not apply to defects caused by misuse or neglect.
Protected under U.S. and foreign patents (see www.insteon.com) © Copyright 2012
INSTEON, 16542 Millikan Ave., Irvine, CA 92606, 800-762-7845, www.insteon.com

INSTEON